


D.E.C.T 703

Multi-Button Intercom

- Digital D.E.C.T wireless intercom system for flats, apartments or shared gate entrances.
- Up to 4 call buttons, each button calling a different handset.
- Working range of 100 metres through concrete (up to 500 metres open field).
- 1 handset per property or apartment.
- Simple setup and install.
- Keypad option for coded access.
- Built in voicemail feature for missed callers, user can listen to messages on handset.

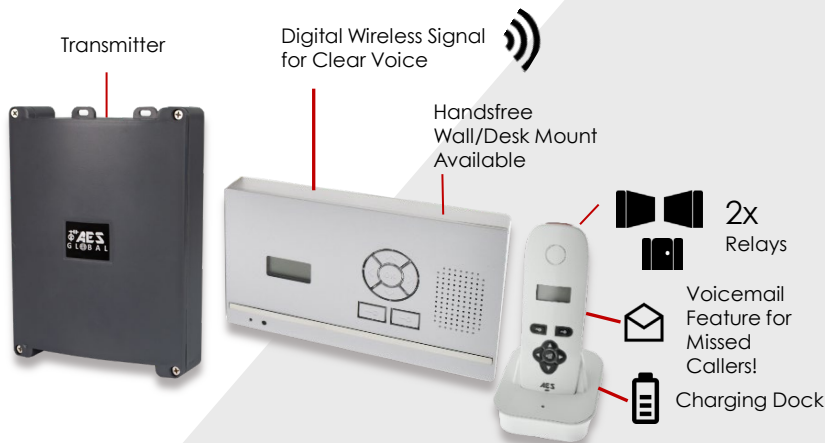

Technical Details

Power Supply	24v ac/dc (24v dc adaptor included).	Cable Between Speech Unit & Transmitter	4 metre screened CAT5 included.
Current Draw	50mA standby, 1 amp peak.	Max Cable Length	8 metres max.
Relay Outputs	2	Cable Cores	2 x SPK, 2 x MIC, 2 x button, 2 x relay, 2 x power.
Relay Time	Adjustable, 1,3,5,9 secs.	Speech Unit IP Rating	IP55.
Relay Load	Max 2 amps, 24v ac.	Transmitter IP Rating	IP65.
Technology Type	Digital DECT.	Manufacturer Warranty	2 years* (RTB).
Handsets per System	4	Keypad Programming	On the keypad.
Range	Practical working range of 100 metres. 500 metres open field conditions.	Keypad Codes	1200 codes total.

703 MODULE RANGE

703 Compulsory Module Options

MOD-CP



Accessory Modules Options

MOD-PRIME-2B



2 Button Module

MOD-PRIME-3B



3 Button Module

MOD-PRIME-4B



4 Button Module

MOD-ASSM-PX-KP



Combined Prox
and keypad

MOD-ASSM-KP



Illuminated
keypad

MOD-PRIME-VIG




Module for Vigik
cut out


BACK BOX OPTIONS




MOD-2x2



MOD-1x2



MOD-1x3



DECT 703 Compulsory items

Up to 4 call buttons, each button calling a different handset.



703-TX2-V2

For a 2 button kit.
2 audio handsets and transmitter.



703-HF-TX2-V2

For a 2 button kit.
2 wall/desk mount audio monitors and transmitter.



703-TX3-V2

For a 3 button kit.
3 audio handsets and transmitter.



703-HF-TX3-V2

For a 3 button kit.
3 wall/desk mount audio monitors and transmitter.



703-TX4-V2

For a 4 button kit.
4 audio handsets and transmitter.



703-HF-TX4-V2

For a 4 button kit.
4 wall/desk mount audio monitors and transmitter.

D.E.C.T 703

Multi-Button Intercom

Pre-assembled Modular Units

WIRELESS MULTI-BUTTON 703 MODULAR UNITS

703-2B



2 Button
Assembled Unit

703-3B



3 Button
Assembled Unit

703-4B



4 Button
Assembled Unit

703-2B-KP



2 Button
Assembled Unit

703-3B-KP



3 Button
Assembled Unit

703-4B-KP



4 Button
Assembled Unit