


Voyager Voice – Multi Button Talking Intercom

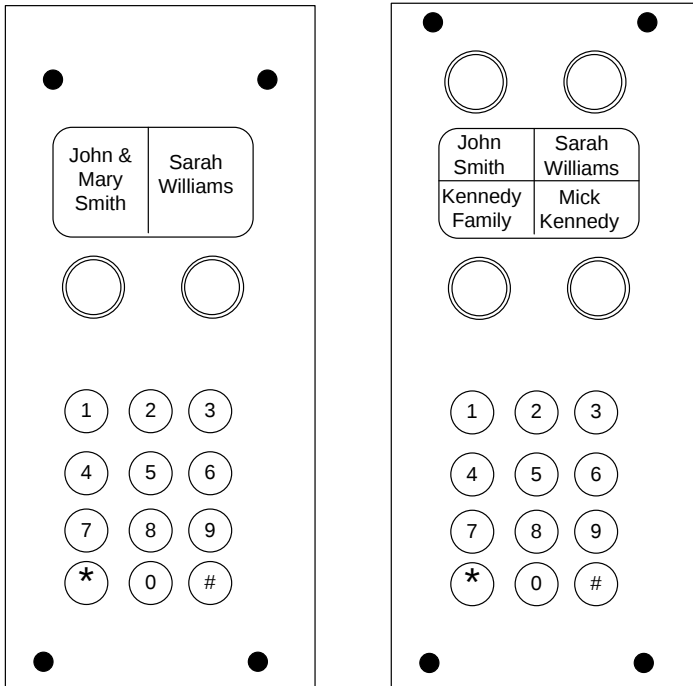

Manual Addendum for setup of a
Multi Button Intercom With Display

Contents


Multi Button Intercoms - Overview	3
Setting Call Out Phone Numbers & Name Text	4
Removing & Changing Call Out Phone Numbers	6
Adjusting Screen Brightness.....	7

Multi Button Intercoms - Overview

Multi Button Intercoms are Intercoms with more than one call out button on their front panel.

Programming a Multi Button Intercom differs from a single button Intercom in the details of setting the call out Phone Numbers (Call Out Phone Numbers are numbers called by the Intercom when the buttons are pressed).

When using the Android or Iphone App you will see screens like below asking you what type of Intercom you are using.


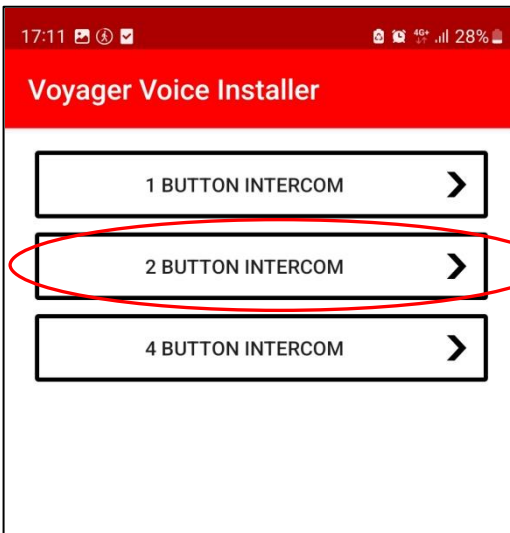


Option to pick if
Installing a 2 Button
Intercom


Setting Call Out Phone Numbers & Name Text

The Screens below give an example sequence using the App to setup Call Out Phone Numbers. First select the Phones option, then “Set Call Out Phones”.

Then for a 2 Button Intercom select “2 Button Intercom” and finally use the next screen for setting 3 phone numbers per Button and the Name Text for Button 1 and Button 2.

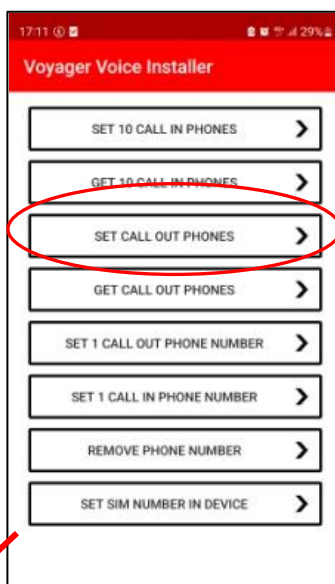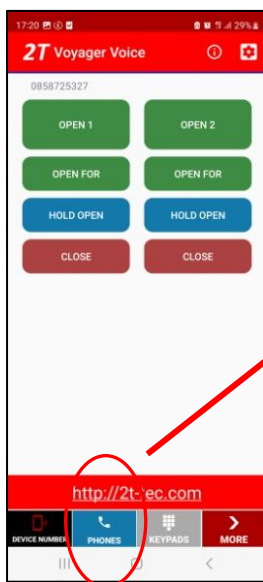


=

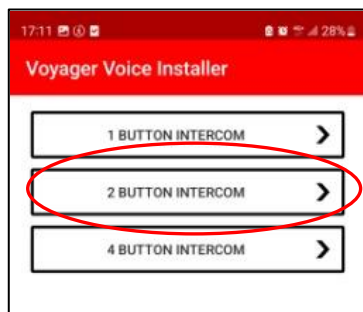


Programming Phone Numbers into the GSM device.

Now program the phone list, with the phone numbers that the GSM device will dial once the intercom button is pressed. For initial testing this is best if it's your own number. It can be changed later using the same screen. Press "Set" to send.


International codes are not required unless the intention is to call a phone number originating in another country.

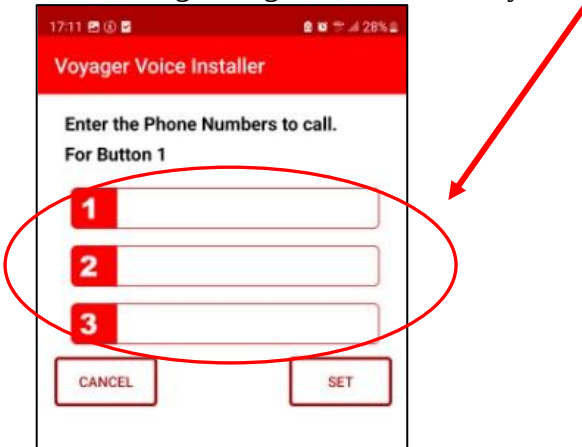


Now program the Text you want displayed for each Button on the Intercom. Enter the text in the top displayed box and then press "Set" to send.

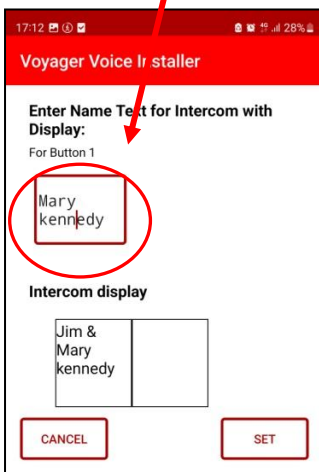


Once the New Name is on the Screen. Enter any 4 digit code on the Keypad to refresh the screen.

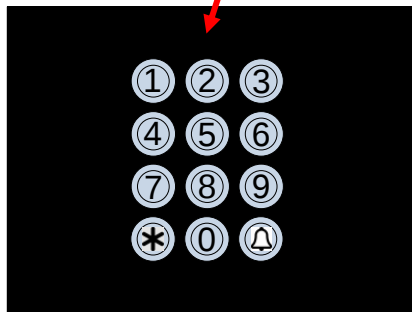

Removing & Changing Call Out Phone Numbers

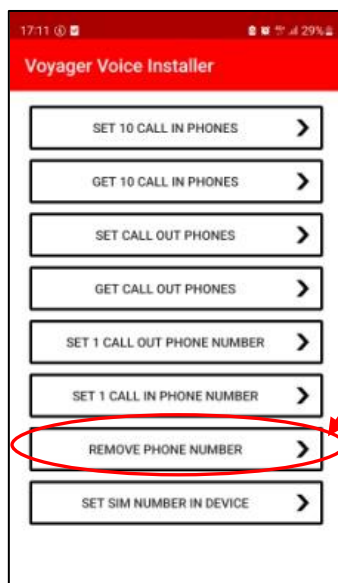

Remove a phone number from the device storage. If the Phone Number to be removed is present more than once, then it is only removed once by using this command. The location of the Phone Number, whether Call In or Call Out is ignored with this option.

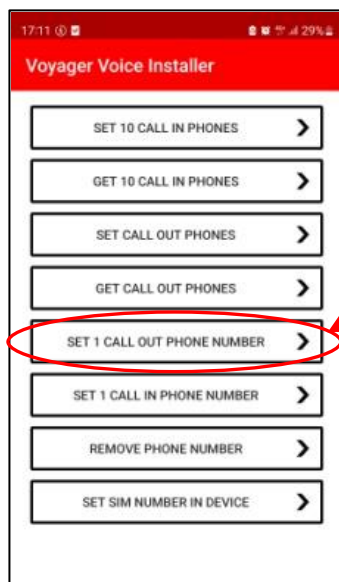


Set one call out Phone Number per button. This is a phone number location between 1 and 3

Adjusting Screen Brightness.

The Adjustment of screen brightness is done best in darkness. Setting it in daylight is likely to give a brightness that is too high for display in darkness.

It is shipped at medium brightness and the Potentiometer on the underneath of the PCB on the back of the display can be adjusted to turn the brightness up or down. This adjustment requires a fine flat head screwdriver

There is also a jumper on the back of the display PCB. This will set the maximum brightness for the display, and is really only to be used for display indoors.

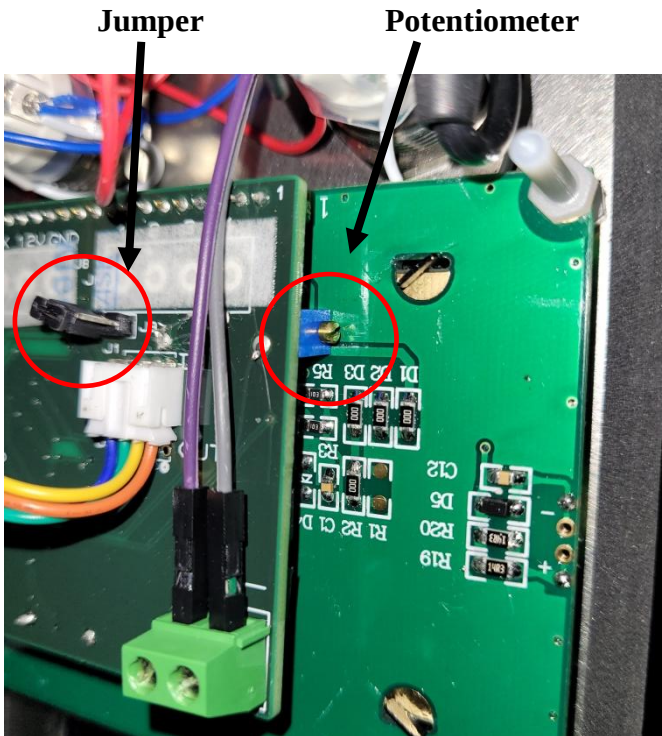

2T-Technology



Rev 2.0

<http://www.2t-tec.com>