

REMOTE CONTROL

Model: SALAPWHREM


1. OVERVIEW

The Wireless Remote control enables you to Arm & Disarm the alarm system before entering the building or after exiting.

Home Mode allows for arming or disarming selected sensors when there is a need for free movement in specific areas of the building.

The Plus button provides customisable functionality (for Plus Subscription customers only).

2. GET TO KNOW YOUR PRODUCT

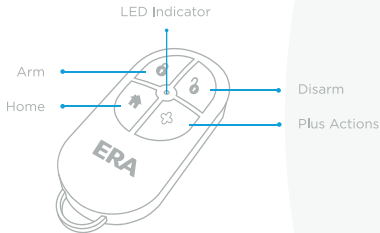

3. LED INDICATION

Flashes Once: Transmits signal

Dim Light level: Low battery indication, change the battery


4. PAIRING A REMOTE CONTROL

Once your hub is set up you will be taken to your Protect home screen.

To add a device press the Add (+) button in the top right hand corner and select Remote.

Follow the on-screen instructions and enter the code from the back of the remote control or scan the QR code.

You can check it has been added by going into settings menu from the Alarm Settings page accessible by the side bar menu (☰).

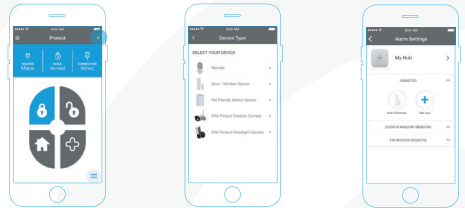





5. NAMING YOUR SENSOR

From the Alarm Settings page, you can see a list of the installed sensors and remotes. Click on the remote control you want to rename and then click 'rename sensor'.

6. SPECIFICATION

| | |
|------------------------|---------------------------------------------------------------------------|
| Power Supply: | 3V Lithium Batteries (CR2450) x 1 |
| Quiescent: | ≤3uA |
| Working Current: | ≤30mA |
| Transmitting Distance: | <100m (in open area) |
| Radio Frequency: | 868 MHz (75±KHz) |
| Housing Material: | ABS Plastic |
| Operations Condition: | Temperature: -10°C - +60°C Relative Humidity: <80% (non-condensing) |
| Remote Dimensions: | 58 x 31 x 9.5mm (L x W x H) |

7. BUTTONS / FUNCTIONS

| | | |
|----------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------|
|  | Plus Action Button | Customisable Plus Action Button (Plus members only) |
|  | Arm Button | Press to arm the ERA Protect system |
|  | Disarm Button | Press to disarm the ERA Protect system |
|  | Home Mode Button | Home Mode allows for arming or disarming selected sensors when there is a need for free movement in specific areas of the building. |