



SPECIFICATION SHEET

Item No.	Version	ECN No.	Change:					Changed Date
26-2996	C		8pin ios length=26±0.1mm					16/06/2020

type c 輸入: KXD-U0b/6

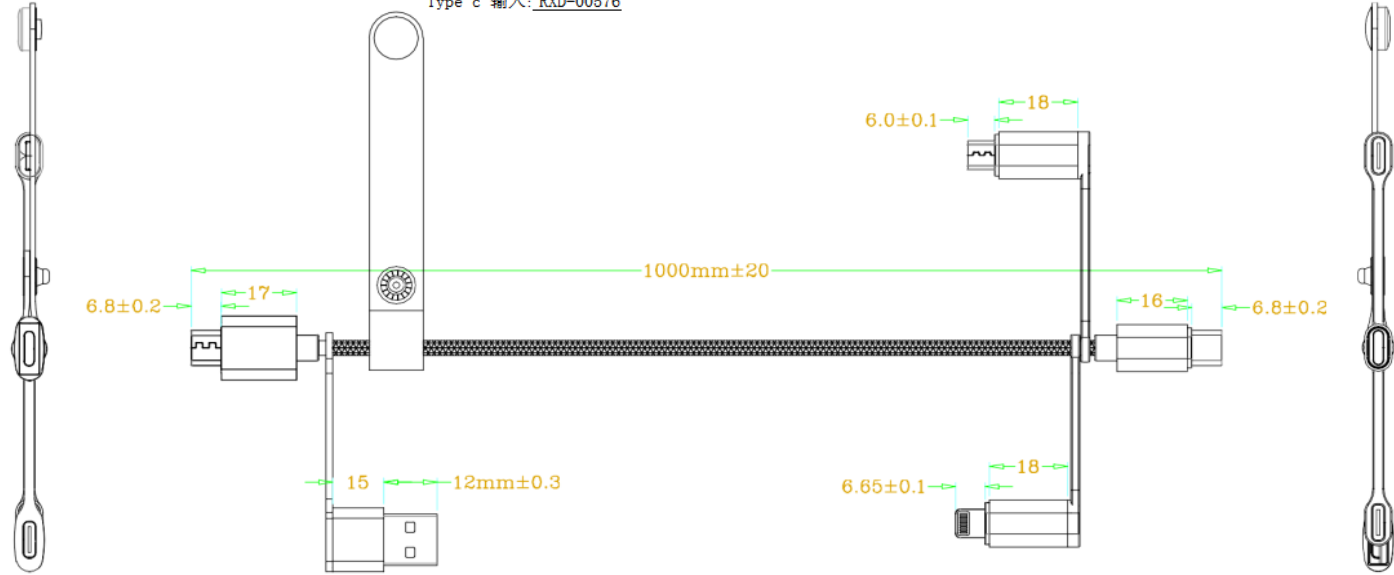

12	GLUE	JN652	KG	AR						
11	RIBBON	Leather ribbon color black(as drawing) (L)108*(W)12.2*(T)1.3mm	PCS		1					
10	ALUMI SHELL	Type c Female Alumi shell adapter color black: (L)18*(W)11*(T)6.1mm (single thickness:0.55mm)	PCS		2					
9	ALUMI SHELL	Type c Alumi shell adapter color black: (L)16*(W)11*(T)6.1mm (single thickness:0.55mm)	PCS		1					
8	ALUMI SHELL	Type c input Alumi color black:(L)17*(W)15*(T)6.8mm(inner dia: 12.1*4.6mm)	PCS		1					
7	ALUMI SHELL	Usb A Male Alumi shell color black: (L)11.5*(W)15*(T)6.8mm(inner dia: 12.1*4.6mm)	PCS		1					
6	PLASTIC	TPE 95A color black ,	KG		0.012					
5	PLUG	Type c Female to micro Male adapter(Length:26±0.15mm)	PCS		1	PRODUCT	1.2m USB 3 in 1 Charge and Sync Cable Type C and Type A to Type C/B Micro/8 pin iOS - Male to Male			
4	PLUG	Type c Female to 8 pin ios (Length:26±0.15mm)	PCS		1	LENGTH	L=1000mm			
3	PLUG	Type c Female to USB A Male PCBA (Length:24±0.1mm)	PCS		1	CUSTOMER	GROUP GEAR			
2	PLUG	Type c PH9.6 5C C TO C TPC9.6/01/BLACK/24H/C2	PCS		2	TOLERANCE				
1	CABLE	(43/0.10Ts)*2C+(10/0.10Ts)*1P+D(10/0.10TC)*1D TPE WHITE JACKET OD:3.2+braid OD:3.8mm	M		0.99					
ITEM	MATERIAL	DESCRIPTION	UNIT	QTY						



Process requirements:
 1、cable length: 990±10mm。
 2、TPC end jacket cutting:6±2mm;tin plating:1.5mm

Test requirements:
 1、100% short circuit、malposition test。
 2、both sides 100% test。



X±1	.XX±0.2	PAGE : 1/1	Scale : N/A	Confirm	07/10/2020
.XXX±0.1	.X±	UNIT : mm	Version : 1	Drawer	06/10/2020