

LM70EVFFC

GARAGE DOOR OPENER

Incredibly smooth, very economical, smartphone controls included.

Super-quiet garage door opener including two 4 channel remote controls and a modern, powerful LED lighting system.




Popular features

- SMART HOME - myQ kit included: operation via smartphone enabled
- Reliable 24V DC motor
- Easy setup and programming
- 3 band multi-frequency radio
- Low standby consumption

Door dimensions und -weight

- One piece doors
max. width 5000 mm
max. height 2500 mm
max. weight 110 kg
- Sectional doors
max. with 5000 mm
max. height 2500 mm
max. weight 110 kg




Inhalt LM70EVFFC

- 1x Drive head
- 2x 4 Channel remote control (TX4EVF)
- 1x myQ Gateway (828EV) & infrared photocells (771EV)
- Quick release (EQL01EV)
- 1x Rail & assembly accessories



The complete list of contents can be found in the assembly instructions.

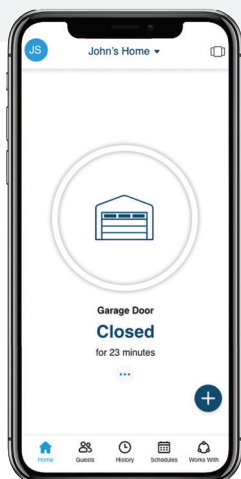

myQ Smart home technology

Monitor and control your EV garage door opener and entrance gate operator or myQ LED from anywhere. Get real time notifications, set schedules and share the app with up to five family members and friends.

Never wonder if your gate is left open again.

Required accessories for myQ operation

- Internet gateway (828EV)
- Infrared photocells (771EV)



Technical specification

Input Voltage	220-240 VAC, 50/60 Hz	Electronic	Automatic force adjustment
Max. Pull Force	700 N	Limit Adjustment	Electronic
Standby Power (door fully closed)	0.8 W	Soft-Start / Soft-Stop	ja
Motor type	DC gearmotor permanent lubrication	Noise level	54dB
Drive Mechanism	Belt	Length of Travel	2682 mm
Opening speed, up to	160 mm/s	Length (Overall)	3367 mm
Max. door weight	110 kg	Headroom Required	min. 35 mm
Max. door dimensions, height / width	2.50 / 5.00 m	Hanging Weight	~ 12 kg
Door Linkage	Adjustable door arm. Pull cord trolley release	Memory Registers	180
		Operating Frequency:	7-Band (433 MHz / 868 MHz)
Safety, Personal	Push button and automatic stop in down direction. Push button and automatic stop in up direction.		
Lamp	On when door starts, off 2-1/2 minutes after stop.		
Electrical	Transformer overload protector and low voltage push button wiring.		
Limit Device	Mechanical RPM/Passpoint detector		
Max. power of the remote control	< 5 mW		

Connectable accessories

Radio accessories	4 channel transmitter (TX4UNIF), 4 channel transmitter (TX4UNIS), two button wireless wall control for internal use only (128EV), wireless keypad (747EV, 850EV, 780EV), 4 channel transmitter (041ATX4EVF), 4 channel transmitter (TX4EVS)
Safety accessories	Infrared Safety Sensor IR (771EV), (G770E), (772E-01) Flashing light (FLA1-LED), Quick release (EQL01EV), (1702EV)
Further accessories	Key switch (flush mount 100034, surface mount 100041), Wired multi-functional wall control (78EV), Wired push button (75EV)



For purchase and professional installation

LiftMaster.eu

For partners

Contact your LiftMaster Representative

Phone Support: 0049 681 870 80 172 | E-Mail: info@chamberlain.com

© 2021 Chamberlain GmbH, All Rights Reserved. | LMSSL70EVFFC 10/21 | Misprints, errors and technical changes reserved.

LiftMaster, the LiftMaster logo, myQ, the myQ logo and Chamberlain are registered trademarks of The Chamberlain Group, Inc. HomeLink® is a trademark of Gentex Corporation | Chamberlain GmbH, Saar-Lor-Lux-Str. 19, D-66115 Saarbrücken

