RADIO CONTROL ROLLING CODE **BEGOOD RH3**



Radio control with variable 66 bit code transmission which guarantees an inviolable degree of security.

- Mod. BeGood RH3/B: three channel (Black) - Mod. BeGood RH3/W: three channel (White)

TECHNICAL CHARACTERISTICS


- Powered by a lithium battery: 3Vdc (CR 2032) - Working frequency: 868.3 MHz - Combinations: 66 bit rolling code - Maximum consumption: <20mA - Working temperature: -10÷55℃ - Dimensions: 32x64x12mm

DESCRIPTION OF FUNCTIONING

The transmitter is complete with 3 buttons for the management of 3 different uses.

WARNING

- The lithium battery Vdc (CR2032) must be changed every two years in order to guarantee the correct functioning of the transmitter.
- In order to substitute the dead battery, follow the illustration.
- The used battery must be disposed of correctly in an appropriate recycling bin.

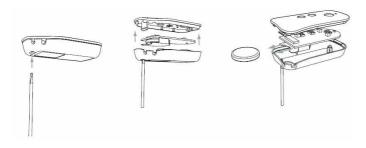

SEAV s.r.l. declares that the products:

Radio control BeGood RH3/B Radio control BeGood RH3/W

comply with the fundamental requirements of the European Directives R&TTE 99/5/EC.



