



DOOR-ENTRY-BK

OYN-X | ACCESS CONTROL - DOOR ENTRY KIT

2 WIRE DOOR ENTRY SOLUTIONS



Melody Setting



Mute Function



Volume Adjustable



Do Not Disturb



OSD Menu

OUTDOOR STATION HIGHLIGHTS

- Wide angle camera
- Backlit name plate and push button
- RFID function
- Non polarity
- White led night vision
- Supports 2 lock
- Supports analog camera connection

OUTDOOR STATION DESCRIPTION

Wide angle, white led, name plate, RFID, surface mount, 2 wire bus power supply, dark grey.

OUTDOOR STATION SPECIFICATION

Resolution: 900 TVL
View Angle: Horizontal 120°
Signal Standard: PAL
Night LED: White
Water & Dust Proof: IP54
Installation: Surface mounting
Power Supply: 30±2Vdc/1.2A from bus
Operation Condition: -20°C ~ +55°C
Dimension: 92(w) x 177.5(h) x 29.5(d)mm
Weight: Net 380.86g Gross 400.86g
Colour: Dark grey

OUTDOOR STATION FEATURES

- High resolution 900tvl, 120 degree wide angel
- White LED with auto day & night mode sensor for night vision
- Large Backlit nameplate
- Supports 2 locks
- Supports analog camera connection
- Central BUS power supply
- Aluminum alloy housing, IK07, IP54
- Surface mounted
- Supports RFID function, 82pcs per panel





DOOR-ENTRY-BK

OYN-X | ACCESS CONTROL - DOOR ENTRY KIT

2 WIRE DOOR ENTRY SOLUTIONS



Melody Setting



Mute Function



Volume Adjustable



Do Not Disturb



OSD Menu

7" INDOOR MONITOR HIGHLIGHTS

- Touch button
- ABS housing
- OSD menu

7" INDOOR MONITOR DESCRIPTION

Touch button monitor, 2 wire Bus power supply, white

7" INDOOR MONITOR SPECIFICATION

Screen resolution: 800(RGB)*480

Signal standard: PAL

Power supply: 30±2Vdc from bus

Dimension: 230(w)*130(h)*16(d)mm

Installation: Surface mounting


Colour: White



7" INDOOR MONITOR FEATURES

- High quality plastic surface panel
- OSD menu
- 16 mm slim design
- 6 Melody

7" INDOOR MONITOR INSTALLATION

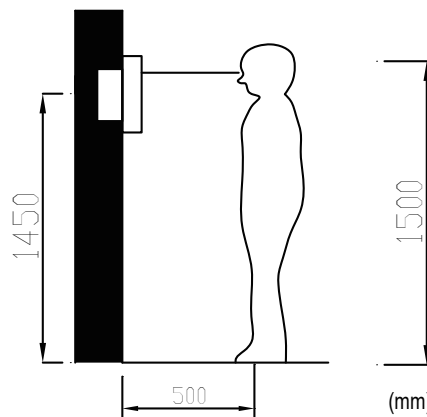



DOOR-ENTRY-BK

OYN-X | ACCESS CONTROL - DOOR ENTRY KIT

2 WIRE DOOR ENTRY SOLUTIONS



POWER SUPPLY HIGHLIGHTS

- System Power Supply
- Din rail mounting

POWER SUPPLY DESCRIPTION

BUS system power supply unit,
100~240Vac/0.6A input, 30V/0.5A output,
DIN rail mounting, white

POWER SUPPLY SPECIFICATION

Input: 100~240Vac/0.6A, 50/60Hz
Output: 30±2Vdc/0.5A
Installation: DIN rail mounting
Dimension: 140(w)*97.5(h)*58.5(d)mm
Weight: Net 367.25g Gross 387.25g
Colour: White

POWER SUPPLY FEATURES

- 30±2Vdc/0.5A
- DIN rail mounting



ACCESSORIES

RFID Token card KIT, inside the outdoor panel box

- 1 setting token (yellow)
- 4 user token (grey)



COMPLETE KIT

Dimensions: 288(w) x 210(h) x 125(d)mm
Weight: Net 1079.73g Gross 1179.73g

Kit Code:
DOOR-ENTRY-BK
 (Button Kit)

