


signalling elements  
accessories



Applicable to the following doors  
roll-up · swinging · sliding · side-hinged  
sectional · guillotine · rapid-roll · glass · barrier  
revolving · pylons

LED

door movement signalling

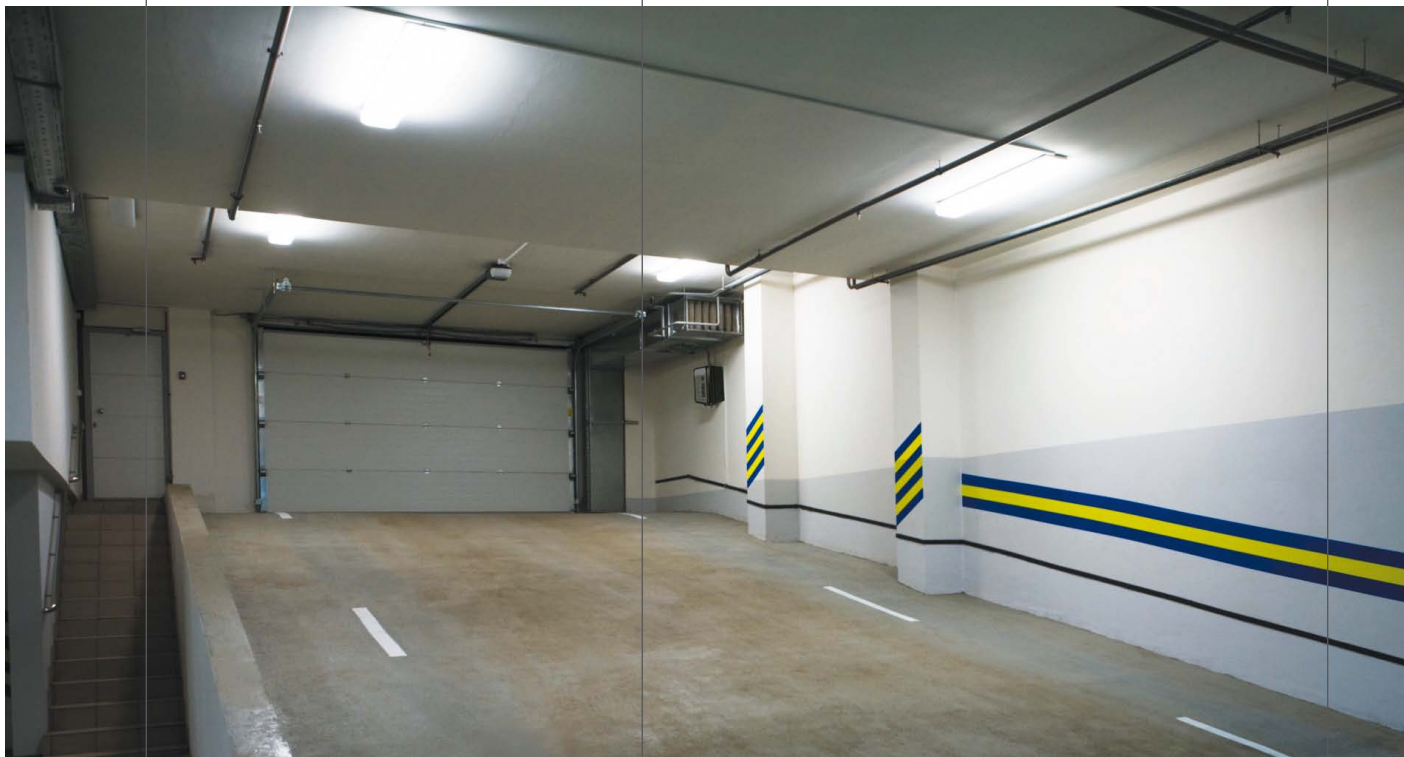

jcmtechnologies  
be a step ahead with technology and imagination



Equipment for signalling

L12/24LED · LD12/24LED  
G TRAFFIC · R TRAFFIC

## FLASHES



- Power supply: 12/24Vac/dc.
- Power: 1W.
- Operating temperature: -20C° to +60C°.
- Exterior cover: Polycarbonate.
- Airtightness: IP65.
- Dimensions: 95 x 165 x 65.

### L12/24LED

- Fixed light.

### LD12/24LED

- Flashing light.

## TRAFFIC LIGHT



- Power supply: 250Vac (max).
- Power: 25 W (max).
- Operating temperature: -30C° to +50C°.
- Airtightness: IP65.
- Weight: 400g.
- Dimensions with visor: 154 x 150 mm.
- Dimensions without visor: 147 x 150 mm.

### G TRAFFIC

- Colour: Green.

### R TRAFFIC

- Colour: Red.