

Novomatic 553S

Remote Control Garage Door Opener



5 year
Warranty*



Garage door automation has never been easier

The Novomatic 553S opener is designed for up and over and sectional garage doors. The ultra-reliable, near silent belt drive operator incorporates a courtesy light and internal quick release. The opener can be enhanced with extra handsets, mini wall mounted push button controllers, key switches and coded keypads.

novoferm

a member of the Sanwa Shutter family

Novomatic 553S

...one powerful automatic unit suitable for sectional and up & over garage doors.

Novomatic features at a glance:

- 700N max push/pull force
- Simple operation
- Soft start and soft stop function
- Integrated shutdown stopping device and electronically monitored push-up safeguard
- Adjustable opening time from 10 to 240 seconds
- Programmable inside lighting and connectable outside lighting
- Two hand transmitters included as standard
- Power economiser
- Manual quick unlocking device in case of power cut etc.

It runs and runs and runs


The wear resistant top-quality toothed belt rail ensures quiet and smooth running and long-term, reliable garage door operation. The toothed belt is reinforced on the inside with fivefold steel cables, oil and acid resistant and completely maintenance-free.

Practical – which ever way you turn it

The flat operator head of the Novomatic can be turned by 90° or 180° if required. This saves up to 15cm space when the slide-in depth is, for example, reduced due to a wall construction. The operator track does not have to be additionally shortened either.

Programming made easy

Novomatic can be conveniently and easily programmed with three buttons and a concise 7 segment display. No setting can be overlooked during programming thanks to the systematic menu navigation. All settings are infinitely saved, even in case of a power cut. The operating state is always recognisable through the transparent cover. Clear error coding allows for a quick and safe fault analysis if required.

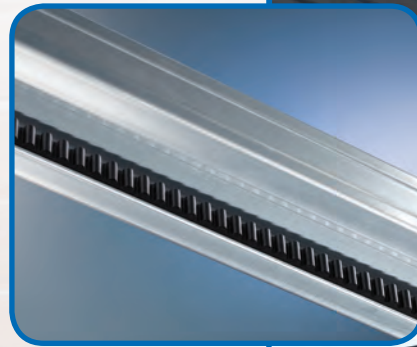

- Simple programmable button technology
- Ultra reliable, super smooth belt drive



- Automatic stop and reverse on contact with obstruction
- Not much room? Drive unit fits at 90°
- Enhance your system with extra handsets, keypad controls and key switch operation.



- Energy saving (Stand-by-consumption - 0.5W). Door select function. Automatic closing. LED technology (LED lifelong 1.6W)
- Maximum door surface 14m²
- Running speed (opening, closing) 22/17cm/Sec

Available from



a member of the Sanwa Shutter family



Novoferm® UK Limited

North Luton Industrial Estate, Unit 5-9, Sedgwick Road, Luton, LU4 9DT
Tel 01582 563 777 Fax 01582 568 801 Email info@novoferm.co.uk

www.novoferm.co.uk

*See brochure for full terms and conditions.