


How to program a new TX4UNIS / TX4UNIF remote into a 4410-433 garage door opener.

1. Take the new TX4UNIS / TX4UNIF remote and slide the cover down to expose the four buttons. Press, hold the left, right hand buttons together, and the white LED is flashing. Keep holding until the LED stays on constant and then let go. Now press the top button on the remote once and the LED flashes, press it a second time and the LED flashes again and now let go, press it a third time and the LED flashes again and now let go. Now press the bottom button once and the LED goes out. The top button of the remote is now set to fixed code mode to match the 4410-433 receiver.



2. Locate the Green "learn button" at the back of the opener.
3. Now press & let go of the Green LEARN button, Green LED indicator light comes on.
4. Press & hold the button on the remote control, for 3 seconds, and the LEDs light will flash. Now let go of the remote control button, LED goes out, and the remote is ready to use.

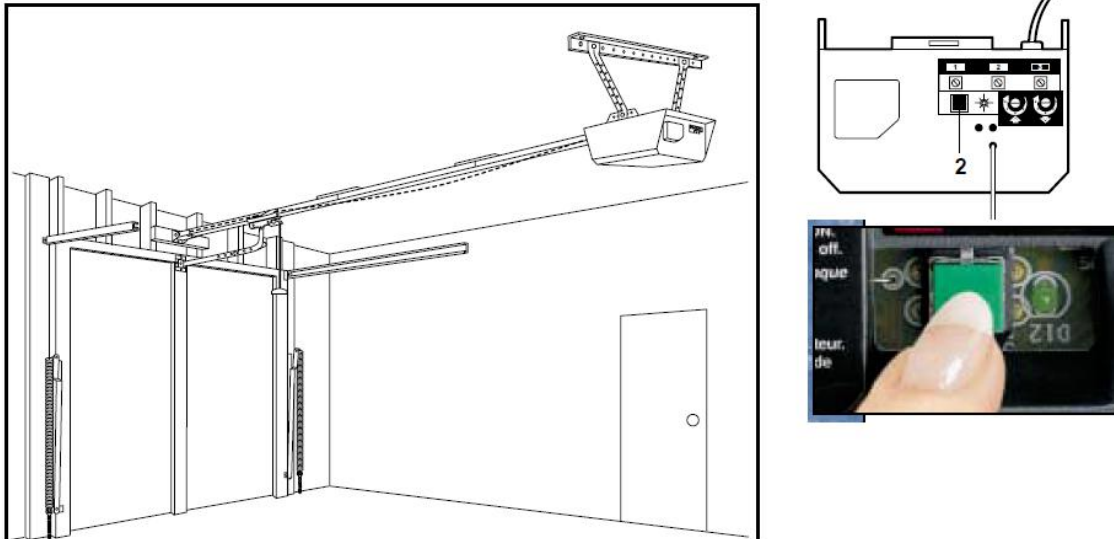

To delete all remote control codes. Press & hold the Green button until the Green LED goes out, then let go. (Approximately 9 seconds).