

## Ins-30071 Net2 desktop reader, proximity and magstripe USB

### Technical Support



01273 811011


[support@paxton.co.uk](mailto:support@paxton.co.uk)

Technical help is available: Monday - Friday from 07:00 - 19:00 (GMT)  
Saturday from 09:00 - 13:00 (GMT)

Documentation on all Paxton products can be found on our website - <http://www.paxton.co.uk/>

### Desktop Reader

The desktop reader is designed to sit next to the PC. It is used for adding tokens to a Net2 system and also for identifying lost cards. Additional workstations can also have desktop readers.

With the Net2 software running, any new token presented above the desktop reader will cause the new user wizard to appear with the card number displayed. Additional user details can then be entered.

If the token is already known to the system, the relevant user's record will appear.



### Installation

Plug the reader into a convenient USB port on the PC using the supplied USB cable.

Stop and then restart the Net2 server program. The device will now be available to the Net2 program.

This unit requires Net2 v3.09 or later software. Call Technical Support if you require a software upgrade.

### Specifications


Specifications			
Environment	Min	Max	
Operating temperatures - all items	0 °C	55 °C	
Waterproof			No
Electrical	Min	Max	
Voltage	4.75V DC	5.25V DC	USB certified
Current		100 mA	
Dimensions	Width	Depth	Height
	145 mm	90 mm	37 mm

# CE0889

The declaration of conformity is available on request.  
Contact details are provided at: <http://paxton.info/596>

## Ins-30071 Net2 desktop reader, proximity and magstripe USB

### Technical Support

 01273 811011

 [support@paxton.co.uk](mailto:support@paxton.co.uk)

Technical help is available: Monday - Friday from 07:00 - 19:00 (GMT)  
Saturday from 09:00 - 13:00 (GMT)


Documentation on all Paxton products can be found on our website - <http://www.paxton.co.uk/>

### Desktop Reader

The desktop reader is designed to sit next to the PC. It is used for adding tokens to a Net2 system and also for identifying lost cards. Additional workstations can also have desktop readers.

With the Net2 software running, any new token presented above the desktop reader will cause the new user wizard to appear with the card number displayed. Additional user details can then be entered.

If the token is already known to the system, the relevant user's record will appear.

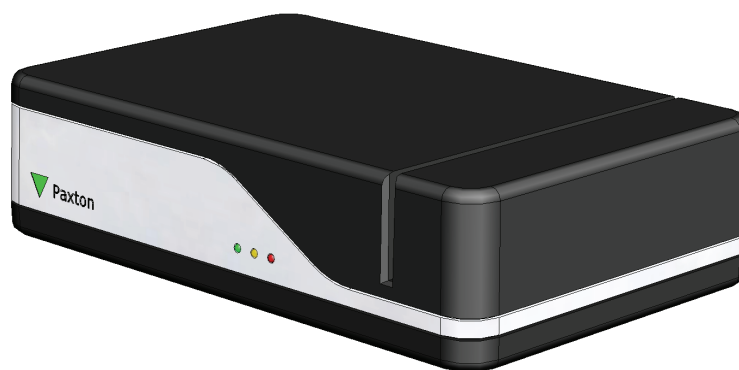

### Installation

Plug the reader into a convenient USB port on the PC using the supplied USB cable.

Stop and then restart the Net2 server program. The device will now be available to the Net2 program.

This unit requires Net2 v3.09 or later software. Call Technical Support if you require a software upgrade.

### Specifications

Specifications			
Environment	Min	Max	
Operating temperatures - all items	0 °C	55 °C	
Waterproof			No
Electrical	Min	Max	
Voltage	4.75V DC	5.25V DC	USB certified
Current		100 mA	
Dimensions	Width	Depth	Height
	145 mm	90 mm	37 mm

**CE0889**

The declaration of conformity is available on request.  
Contact details are provided at: <http://paxton.info/596>