

# Ins-30156 PROXIMITY P series Wiegand output - Biomet



#### **Fitting**

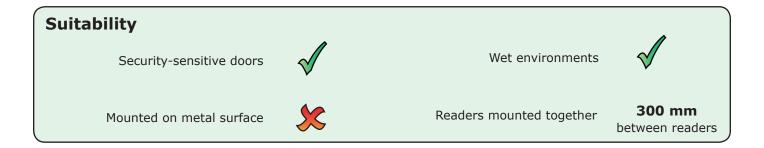


## **Wire outputs**

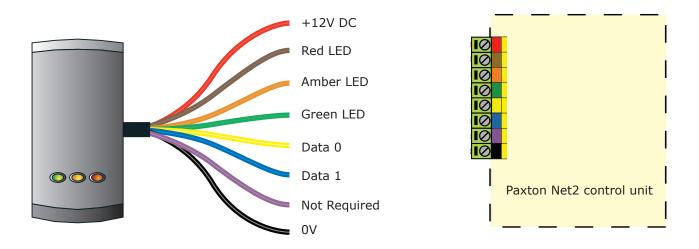

#### **Cable extensions**

Readers can be extended using Belden CR9540 10-core overall screened cable to a maximum of 100 metres.

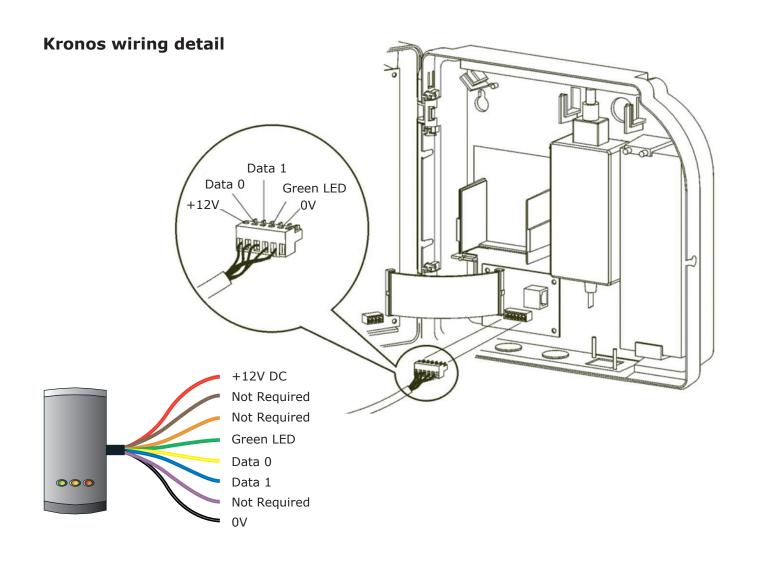

Specifications				
	Min	Max		
Environment				
Operating temperature	-20 °C	+55 °C		
Cable length			5 metres	
IP Rating	IPX7		Outdoor Use	
Electrical				
Voltage	10V DC	14V DC		
Current	50 mA	120 mA		
Carrier frequency			125 kHz	
Wiegand format			26 bits	
Dimensions				
	Width	Height	Depth	
Reader	50mm	100mm	15mm	



Paxton Access Ltd hereby declares that this product is in conformity with all the essential requirements of Directive 1999/5/EC. This equipment is intended for use in all EU and EFTA countries and all other countries worldwide.

The declaration of conformity is available on request. Contact details are provided at: <a href="http://paxton.info/596">http://paxton.info/596</a>


## Ins-30156 PROXIMITY P series Wiegand output - Biomet



## **Fitting**




## **Wire outputs**

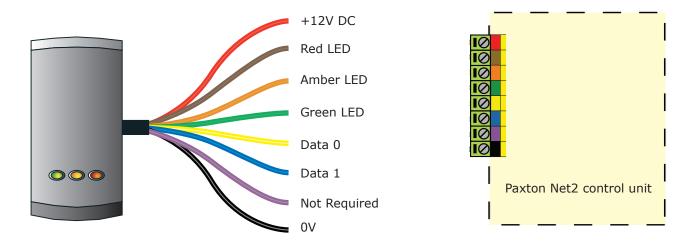

#### **Cable extensions**

Readers can be extended using Belden CR9540 10-core overall screened cable to a maximum of 100 metres.

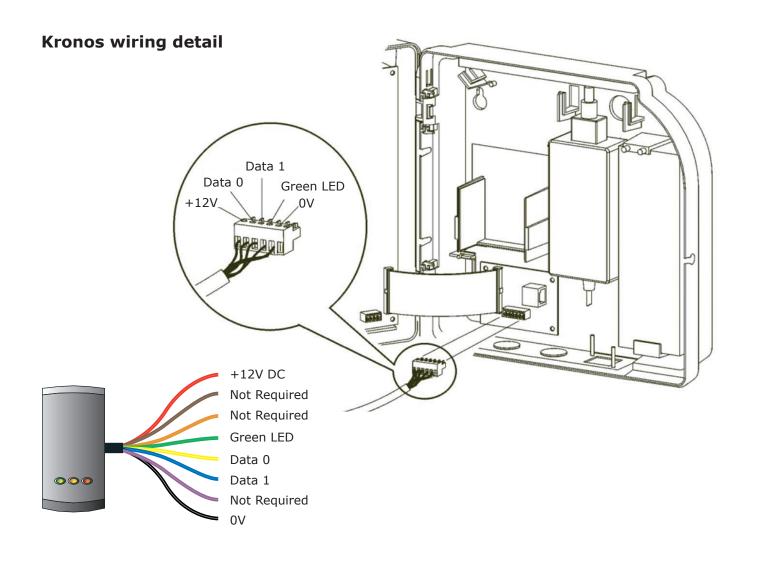

Specifications				
	Min	Max		
Environment				
Operating temperature	-20 °C	+55 °C		
Cable length			5 metres	
IP Rating	IPX7		Outdoor Use	
Electrical				
Voltage	10V DC	14V DC		
Current	50 mA	120 mA		
Carrier frequency			125 kHz	
Wiegand format			26 bits	
Dimensions				
	Width	Height	Depth	
Reader	50mm	100mm	15mm	



Paxton Access Ltd hereby declares that this product is in conformity with all the essential requirements of Directive 1999/5/EC. This equipment is intended for use in all EU and EFTA countries and all other countries worldwide.

The declaration of conformity is available on request. Contact details are provided at: <a href="http://paxton.info/596">http://paxton.info/596</a>