



INTRACALL INTERCOM



- ✔ Easy integration into a post (width: 88mm)
- ✔ 7 numbers programmable per day
- ✔ Ideal for securing a residence or car park

INTRACALL intercom - audio intercom with one call button, flush fit



REMOTE ONLINE MANAGEMENT
www.intratone.com

AUDIO SYSTEM

CONNECTION

3G unit / 3G-IP Intratone (mobile networks)

FITTING

Flush-fit


Surface-mounted

Optional with
12-0145-XX

FINISH

Stainless steel

SIMPLIFIED DIAGRAM

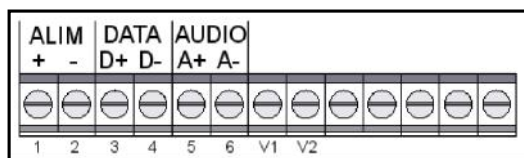

Option of adding a remote analogue PAL camera!

- Speech synthesis
- Operational messages (call in progress, etc.)
- Sound level adjustment: via the central unit (03-0101-XX)
- Call transfer

TECHNICAL SPECIFICATIONS

POWER SUPPLY

Central unit
12/24 V DC
2A

WIRING

Central unit - Intercom
6 wires (3 twisted pairs)
- Ø 0.8mm

Max. distance: 200m
Central unit - 3G unit
6 wires (3 twisted pairs)
- Ø 0.8mm
Max. distance: 100m

Central unit - PSTN line
2 wires- Ø 8mm
Max. distance: 200m

INTERCOM SIZE

Intercom Facade
LxHxD = 88 x 180 x 4mm
Built-in wall box
LxHxD = 68 x 160 x 40mm
Surface mounted box (optional):
LxHxD = 185 x 185 x 60 (top)/45 (bottom) mm

ENVIRONMENT

Intercom operating temperature
-10°C to +60°C
Intercom storage temperature
-20°C to +70°C
Intercom protection class
Intercom IP55
Outdoor fitting

INTRACALL INTERCOM RANGE

REFERENCES		OUR PRICES
14-0144-XX	INTRACALL intercom with 1 call button	
PACKS		
18-0015001	INTRACALL intercom with 1 call button + Central unit for 1 door + 3G Module with unlimited prepaid audio communications for 15 years.	
18-0016001	INTRACALL intercom with 1 call button + Central unit for 1 door + 3G-IP Module with unlimited prepaid video communications for 15 years (if using a remote analogue PAL camera).	
ACCESSORIES		
12-0145-XX	Surface-mounted box for INTRACALL intercoms – Stainless steel finish	