


MINI AUDIO HANDSFREE





#### 6750W

# HANDS-FREE BM MINI DOOR-ENTRY PHONE. S2

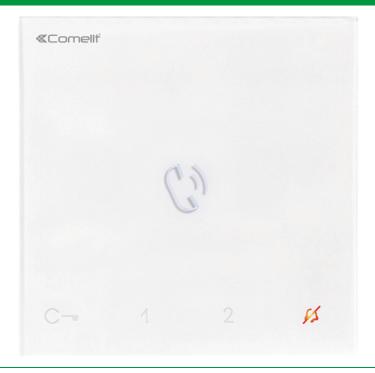



Mini series door-entry phone with full-duplex audio and integrated magnetic induction amplification system. Allows loudspeaker volume control and ringtone volume control, with choice of different melodies. Equipped with 5 touch sensitive buttons for audio key, lockrelease, actuator control, switchboard call and privacy function, with door status indicator LED. Manages floor door calls as standard. Complete with 2 x 8-position dip-switches for programming user code and buttons. Wall-mounted. The door-entry phone can be used in Simplebus2 2-wire systems with mixer art. 4888/C, Simplebus2 with power supply art. 1210 or kit that use the power supply art. 1209. Complete with distribution terminal art. 1214/2C. Dimensions: 4.13"x4.13"x0.79".





**MINI AUDIO HANDSFREE** 





#### 6750W

# HANDS-FREE BM MINI DOOR-ENTRY PHONE. S2

| MAIN FEATURES              |       |
|----------------------------|-------|
| Audio/video system         | Yes   |
| Wall-mounted               | Si    |
| Desk base-mounted          | Si    |
| Hands-free function        | Yes   |
| Induction loop function    | Yes   |
| Colour                     | White |
| Sensitive Touch technology | Yes   |
| Total buttons (n°)         | 5     |
| LED signaling (no.) (n°)   | 3     |

### FUNCTIONS

| I GNETIONS                 |     |
|----------------------------|-----|
| Actuator control function  | Yes |
| Switchboard call function  | Yes |
| Priority calls             | Yes |
| Intercom function          | Yes |
| Selective intercom call    | Yes |
| Call to multiple addresses | Yes |
| Privacy function           | Yes |
| Doctor                     | Yes |
| Floor door call function   | Yes |
| Electronic bell            | Yes |
| Customisable ringtone      | Yes |
| Key button function        | Yes |

| HARDWARE SPECIFICATIONS |     |
|-------------------------|-----|
| Removable terminals     | Yes |



**MINI AUDIO HANDSFREE** 





#### 6750W

# HANDS-FREE BM MINI DOOR-ENTRY PHONE. S2

| SETTINGS                   |     |
|----------------------------|-----|
| Loudspeaker volume control | Yes |
| Ringtone volume control    | Yes |

## GENERAL DATA

| Height (mm) | 105 |
|-------------|-----|
| Width (mm)  | 105 |
| Depth (mm)  | 20  |

| COMPATIBILITY                   |     |
|---------------------------------|-----|
| Simplebus 2 audio/video system  | Yes |
| Building Kit audio/video system | Yes |
| Kit audio/video system          | Yes |

| TECHNICAL CHARACTERISTICS            |               |
|--------------------------------------|---------------|
| Supply voltage                       | 22÷35VDC      |
| Absorption during communication (mA) | 130           |
| Operating temperature (°C)           | 5 ÷ 40        |
| Operating humidity (% RH max)        | 25÷75         |
| Weight (g)                           | 150           |
| Clamps                               | L L CFP1 CFP2 |



MINI AUDIO HANDSFREE

# 4/4



#### 6750W

# HANDS-FREE BM MINI DOOR-ENTRY PHONE. S2

#### ACCESSORIES



6754 ADAPTER PLATE FOR MINI HANDSFREE AUDIO